

# Homogenizer HL3

- Max. 13.000 l/h
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 55 kW
- Aseptic execution optional
- Poppet valve for low viscous and slightly abrasive products
- Ball valves for high viscous and abrasive products
- Made in Germany


*Weight with Motor: max. 2.950 kg  
Technical changes reserved!*



## Poppet valves

For low viscous and slightly abrasive products

Model	Max. Pressure	Max. Capacity
HL3	(bar)	(Liter per hour)
-100T	100	13.000
-150T	150	11.500
-200T	200	10.000
-250T	250	7.500
-300T	300	6.000
-350T	350	6.000
-550T	550	3.000

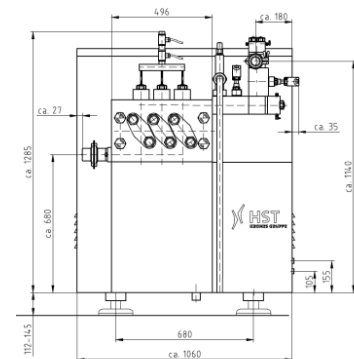

## Ball valves

For high viscous and abrasive products

Model	Max. Pressure	Max. Capacity
HL3	(bar)	(Liter per hour)
-150K	150	8.700
-200K	200	7.000
-250K	250	5.800
-300K	300	5.000
-350K	350	4.800
-550K	550	2.000
-700K	700	1.500

