

Homogenizer HL5

- Max. 37.000 l/h
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 160 kW
- Aseptic execution optional
- Poppet valve for low viscous and slightly abrasive products
- Ball valves for high viscous and abrasive products
- Made in Germany




*Weight with Motor: max. 7.500 kg
Technical changes reserved!*

Poppet valves

For low viscous and slightly abrasive products

Model	Max. Pressure	Max. Capacity
HL5	(bar)	(Liter per hour)
-140T	140	37.000
-150T	150	34.000
-200T	200	28.000
-250T	250	21.000
-300T	300	18.000
-350T	350	15.000
-550T	550	9.500

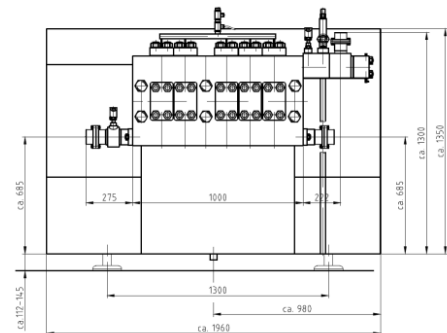

Ball valves

For high viscous and abrasive products

Model	Max. Pressure	Max. Capacity
HL5	(bar)	(Liter per hour)
-150K	150	25.000
-200K	200	25.000
-250K	250	21.000
-300K	300	17.500
-350K	350	15.500
-550K	550	8.500
-700K	700	7.500

