

# Homogenizer HL6

- Max. 47.000 l/h
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 220 kW
- Aseptic execution optional
- Poppet valve for low viscous and slightly abrasive products
- Ball valves for high viscous and abrasive products
- Made in Germany




*Weight with Motor: max. 7.585 kg  
Technical changes reserved!*

## Poppet valves

For low viscous and slightly abrasive products

Model	Max. Pressure	Max. Capacity
HL6	(bar)	(Liter per hour)
-140T	140	47.000
-150T	150	45.000
-200T	200	35.000
-250T	250	30.500
-300T	300	22.500
-350T	350	19.500
-550T	550	13.500

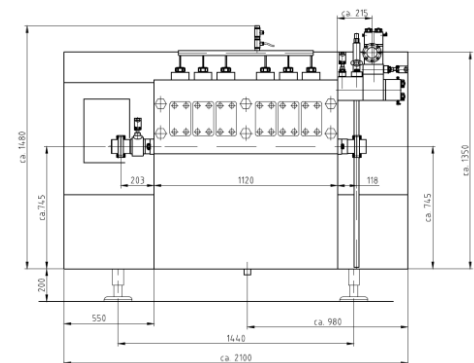

## Ball valves

For high viscous and abrasive products

Model	Max. Pressure	Max. Capacity
HL6	(bar)	(Liter per hour)
-150K	150	30.000
-200K	200	30.000
-250K	250	26.000
-300K	300	21.000
-350K	350	19.000
-550K	550	12.000
-700K	700	9.500

